

B0650 LD Light Source



The Appointech B0650 handheld LD stabilized light source has output wavelength at 650nm. The output power is highly stabilized by a proprietary circuit design. The operation is very user friendly. After turning on with the ON/OFF switch, 650nm wavelength and its output power are shown on the LCD. The output power for 650nm is preset at -3 dBm, or at a customer-defined value. The output can be DC, or modulated at 10Hz for fiber fault locating, and 270Hz, 1KHz, or 2KHz by pressing the Hz-key, which is also shown on the LCD. When in Auto-Off mode, as indicated by a power symbol with a cross on the LCD, the power will be shut off after about 10 minutes on-time for battery life, in case not in use for a prolonged time. To turn it back on, press the ON/OFF switch again. The auto-off feature can be disabled by pressing the Auto-Off key, as indicated by a power symbol without a cross. When the battery power is too low to assume proper operation, an empty battery symbol is shown on the LCD display. The included rechargeable battery works with a power adaptor of a USB connector, which is also included. When charging is in OFF-mode, the indicator LED will be on until charging has been completed.

Features

- Wavelength at 650nm
- Ultra high output stability ± 0.05 dB
- High output power preset at -3 dBm, or at customer-defined value
- Selectable CW, 270 Hz, 1KHz or 2KHz modulated output
- Small size, easy for field applications
- Light weight, less than 0.2Kg
- Auto power shut-off can be disabled
- Auto laser shut off at above 60° C
- Rechargeable battery, Battery-full and Battery-low indicator

Applications

- Component measurements
- Fiber fault locating
- Transmission loss measurement
- Sensing systems
- Calibration of optical receivers

B0650 LD Light Source

Specifications

Wavelength Central Spectral Width	650nm +/- 20nm FP LD < 4 nm
Stability (1 hr)	±0.05dB
Power Output: (Into 9/125um Fiber)	-3dBm (or customer specified)
Power Output Uncertainty	0.5 dB
Functions	ON/OFF (Power switch) Hz (Modulated output mode) Auto shut off at 60°C Auto shut off after 10 minutes turn-on time Auto shut off disabled Low battery power indication
Modulation Frequencies	10 Hz, 270Hz, 1kHz or 2kHz
Optical Connector Interface	FC or ST or SC, adapter for other connector available
Power	Rechargeable Lithium battery, works continuously for 8 hrs after 2-hrs full charge
Environmental: Operation Temp. Humidity Storage Temp. Humidity	-15°C to 50°C, 0-95% RH (non-condensing) -35°C to +70°C, 0-95% RH (non-condensing)
Dimensions (Length x Width x Height)	16x7x3 cm (measured without case)
Weight (w/ batteries)	<0.2Kg


Ordering information

B 0650 — Output Power
 e.g. 3 for -3 dBm
 — Connector type
 SC, FC, ST

Options: Standard Multi-units Carrying Case
 Heavy-Duty Multi-units Carrying Case
 Receptacle Converters

B0650 LD Light Source

B0650 LD Light Source

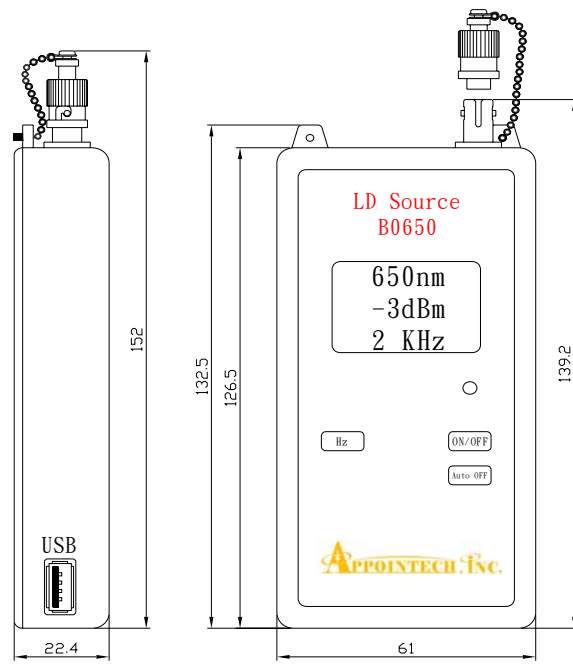

Unit:mm

